



NP – 162

I Semester B.C.A. Degree Examination, May 2022  
(NEP – 2021-2022 and Onwards)  
**COMPUTER SCIENCE**  
Paper – 1.1 : Discrete Structures



Time : 2½ Hours

Max. Marks : 60

**Instruction :** Answer **any four** questions from **each** Section.

SECTION – A

I. Answer **any four** questions. **Each** question carries **2** marks.

(4×2=8)

- 1) Find the intersection  $A \cap B$  and set difference  $A - B$  if  
 $A = \{1, 3, 5, 7, 9\}$  and  $B = \{2, 3, 4, 5, 6, 8\}$ .
- 2) Prove that  $(p \rightarrow q) \leftrightarrow (7q \rightarrow 7p)$  is a tautology.
- 3) Find the values of i)  $4P_3$  ii)  $6C_3$ .
- 4) Find  $A^{-1}$  if  $A = \begin{bmatrix} 6 & 3 \\ 2 & 4 \end{bmatrix}$ .
- 5) Define the terms :  
i) Graph ii) Adjacency Matrix.
- 6) What is a minimum cost spanning tree ?

SECTION – B

II. Answer **any four** questions. **Each** question carries **5** marks.

(4×5=20)

- 7) Prove that for any three propositions  $p, q$  and  $r$  show that  
 $p \rightarrow (q \wedge r) \equiv [(p \rightarrow q) \wedge (p \rightarrow r)]$ .
- 8) Consider the functions  $f$  &  $g : \mathbb{R} \rightarrow \mathbb{R}$  defined by  $f(x) = x^2 + 5$  and  $g(x) = 5x - 3$ .  
Find the composite functions.  
i)  $f \circ g$  ii)  $g \circ f$  iii)  $f \circ f$





9) How many ways are there to form a committee, if the committee consists of 3 women and 4 men if there are 6 women and 7 men ?


10) Define rank and nullity of a matrix. Find the rank of the following matrix

$$A = \begin{bmatrix} 3 & -1 & 4 \\ 6 & 1 & -1 \\ 1 & 5 & 8 \end{bmatrix}.$$

11) Define isomorphism of graphs. Verify that the two graphs shown below are isomorphic or not.

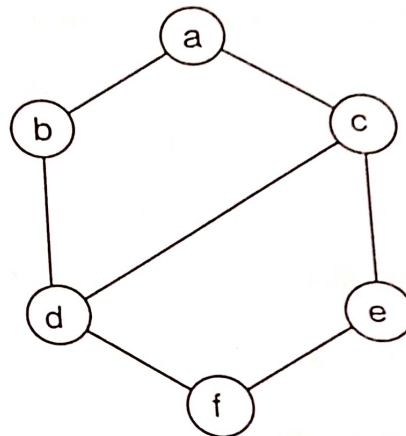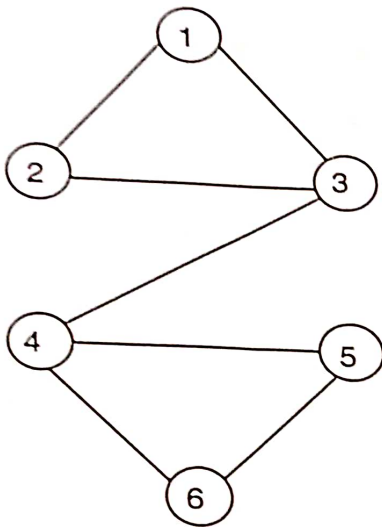

12) What is a Hamiltonian circuit ? Check whether the following graph contains Hamiltonian circuit. Justify your answer.

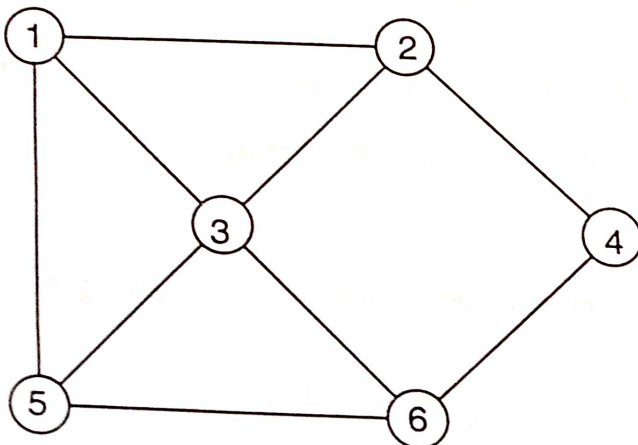

## SECTION - C

III. Answer **any four** questions. **Each** question carries **8** marks.

(4×8=32)

13) Let A and B non-empty sets. Define :

i) One-to-one function

ii) Onto function

iii) Bijective function

iv) if  $|A| = 4$  and  $|B| = 7$  find the number of functions from A to B.

14) Using Mathematical induction prove that  $1^3 + 2^3 + 3^3 + \dots + n^3 = \frac{n^2(n+1)^2}{4}$  where n is a natural number ?

15) a) In how many ways can the letters of the word 'LEADING' be arranged in such a way that the vowels always come together ?

4

b) A box contains 2 white balls, 3 black balls and 4 red balls. In how many ways can 3 balls be drawn from the box, if atleast one black ball is to be included in the draw ?

4

16) Solve the following system of linear equations using Cramer's rule.

$$x + y + z = 6$$

$$2x + 3y - z = 5$$


$$6x - 2y - 3z = -7$$

17) a) If  $2A + B = \begin{bmatrix} 4 & 4 & 7 \\ 7 & 3 & 4 \end{bmatrix}$

$A - 2B = \begin{bmatrix} -3 & 2 & 1 \\ 1 & -1 & 2 \end{bmatrix}$  then find A and B.

4

b) Find the in order, preorder and post order traversal of the following tree.

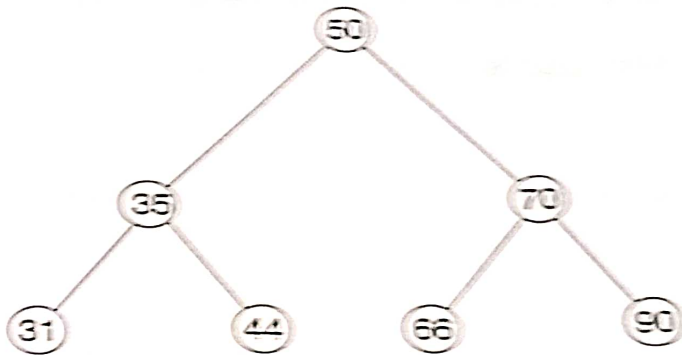

18) Obtain the minimum cost spanning tree for the following graph using Kruskal's algorithm.

